

TechMaster

FEATURES

KEYPAD

- 16x2 Display
- 10 alphanumeric keys
- Function keys
- Keypad test
- Automatic DST
- Green/Red Led
- Buzzer
- Battery compartment
- Dallas key reader
- Power
 - 9V alkaline battery
 - battery box
 - power supply

Not all the features are available in the standard configuration. Please remember to request the desired functions.



SwingBolt



DeadBolt



LatchBolt



Motor LatchBolt Lock



MotorLock



MotorLock Push&Pull





LOCKS

- 2 Master - 2 Manager - 1 Override manager
- 89 Users (standard/override)
- Dynamic codes (OTC)
- Codes expiration
- Multi-lock option
- Time delay 1-99 minutes
- Open window 1-19 minutes
- Variable time delay
- Audit trail with time and date 15.000 events
- Dallas key management
- Silent alarm
- Remote disable opening
- Remote time delay override
- Penalty
- Input/output interface
- Remote management (TCP/IP, RS485)
- Dual mode for group/user opening
- Up to 3 different weekly time lock
- Opening and closing periods
- Temporary time lock
- Immediate time lock
- Keypad and pc programming




TechMaster


TechMaster Keypad

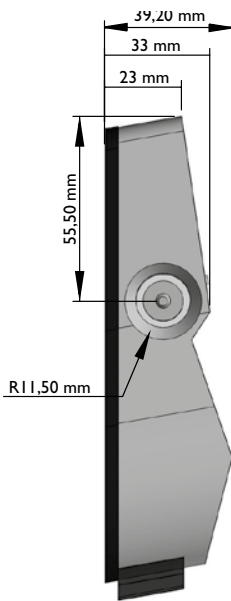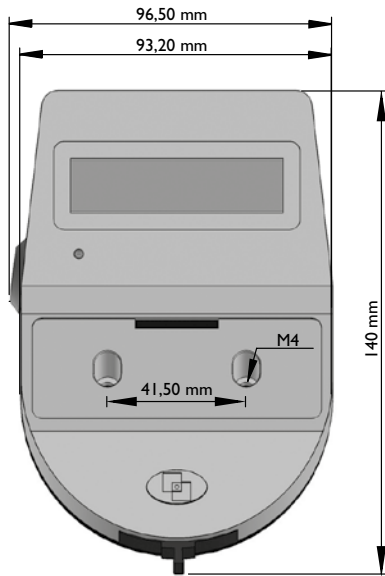


SwingBolt

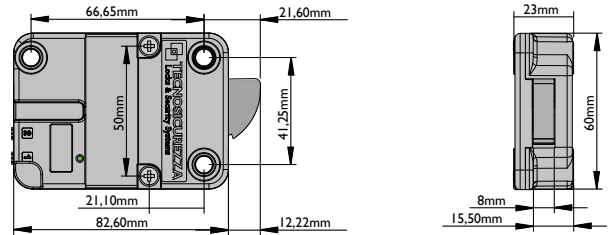


DeadBolt

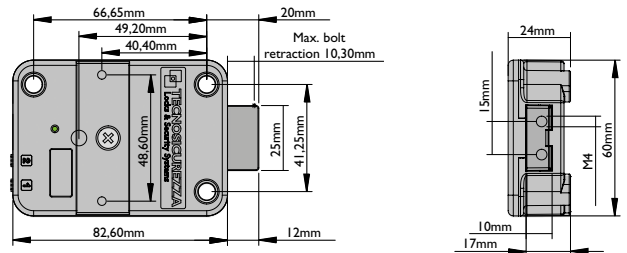


LatchBolt

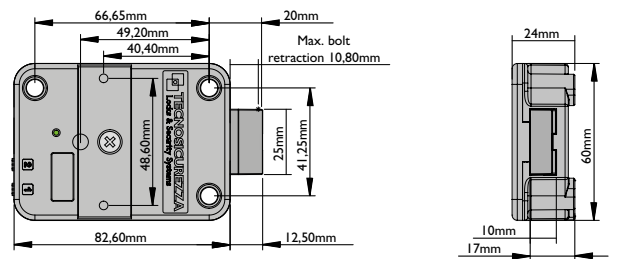

MotorLock/MotorLock Push&Pull

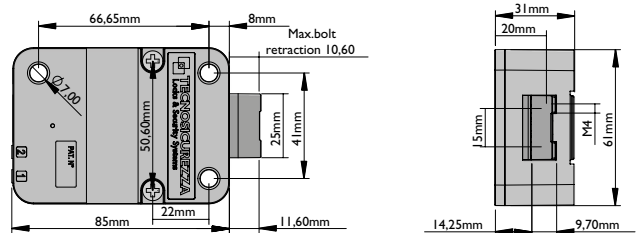

Motor LatchBolt Lock

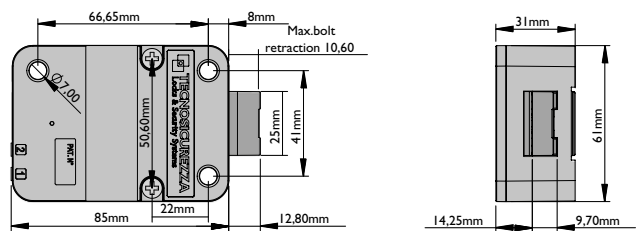

 One Time Code Software
  One Time Code App

 Remote Management Software
  Remote Management App
SOFTWARE AVAILABLE UPON REQUEST

v. 2.2-23

GLOBAL HEADQUARTERS

Tecnosicurezza SpA
Via C. Battisti, 276
37057 S. Giovanni Lup. (VR)
ITALY
info@tecnosicurezza.it
www.tecnosicurezza.it

USA HEADQUARTERS

Tecnosicurezza Inc
133, Trade Street-Suite 4
Lexington, KY 40511
USA
info@usatecno.com
www.usatecno.com

SPAIN HEADQUARTERS

Tecnosicurezza SA
C/Menor, 4 - Nave 10, Pol Ind. "La Mina"
28770 Colmenar Viejo
SPAIN
info@tecnosicurezza.es
www.tecnosicurezza.es